



Shaft ladder LW 400mm

9624031



GTIN: 4007126033406

Certified as compliant with current European directives

Material  
steel hot dip galvanized 1.0037 / ASTM A36

Length in m | Number of rungs  
0,84 m | 3 Rungs

- Hailo shaft ladders are non-corroding and have easy-grip rail profiles
  - The perforated profile ensures non-slip, foot-sure rungs
  - Wall brackets: 1 pair of wall brackets at least every 1.96 m
  - Other lengths can be achieved by combining the basic ladders according to the depth of the structure
  - Shorter ladders, special lengths and widths and special profiles available on request
- 
- Rail: square profile 40x20mm
  - Rungs: perforated U-profil 30x30mm

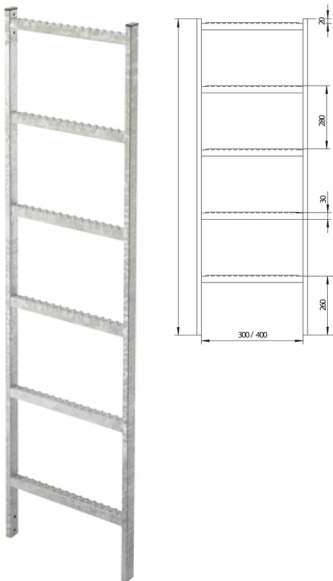

Specifications

Width in mm	400
Rung spacing 280mm	✓
Number of rungs	3
Length in m	0,84
Material	steel hot dip galvanized 1.0037 / ASTM A36



Length in m   Number of rungs	0,84 m   3 Rungs
-------------------------------	------------------