



Shaft ladder LW 400mm

9624061



GTIN: 4007126033437

Certified as compliant with current European directives

Material
steel hot dip galvanized 1.0037 / ASTM A36

Length in m | Number of rungs
1,68 m | 6 Rungs

- Hailo shaft ladders are non-corroding and have easy-grip rail profiles
 - The perforated profile ensures non-slip, foot-sure rungs
 - Wall brackets: 1 pair of wall brackets at least every 1.96 m
 - Other lengths can be achieved by combining the basic ladders according to the depth of the structure
 - Shorter ladders, special lengths and widths and special profiles available on request
-
- Rail: square profile 40x20mm
 - Rungs: perforated U-profil 30x30mm

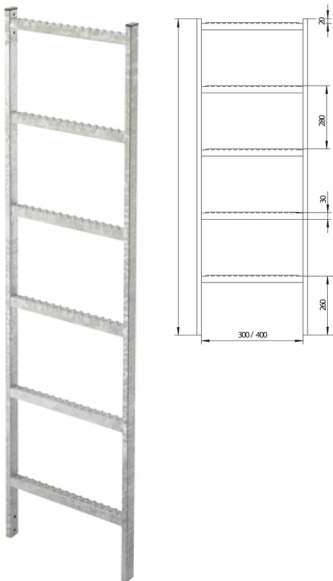

Specifications

| | |
|--------------------|--|
| Width in mm | 400 |
| Rung spacing 280mm | ✓ |
| Number of rungs | 6 |
| Length in m | 1,68 |
| Material | steel hot dip galvanized 1.0037 / ASTM A36 |



| | |
|-------------------------------|------------------|
| Length in m Number of rungs | 1,68 m 6 Rungs |
|-------------------------------|------------------|